


MAP TO BE EDITED

- For public parcels on former freeway ramps in the Transbay (along Folsom Street between Essex and Spear Streets, and between Main and Beale Streets north of Folsom Street) create a new category called "Transbay Mixed-Use Residential." Add this to the reference chart with notation, "See Transbay redevelopment Plan and Development Controls"
- Extend the "Downtown Office" designation to the southern half of the block between Spear Street and Stuart Street/Embarcadero on the north side of Folsom Street.
- Change the land use designation for Lot 003 in Assessor's Block 0312 from C-3-R to C-3-O. (2004.0165)
- Extend the "Downtown Office" designation to include Lots 011 & 012 in Assessor's Block 0241, and add a land use designation to these lots of C-3-O.

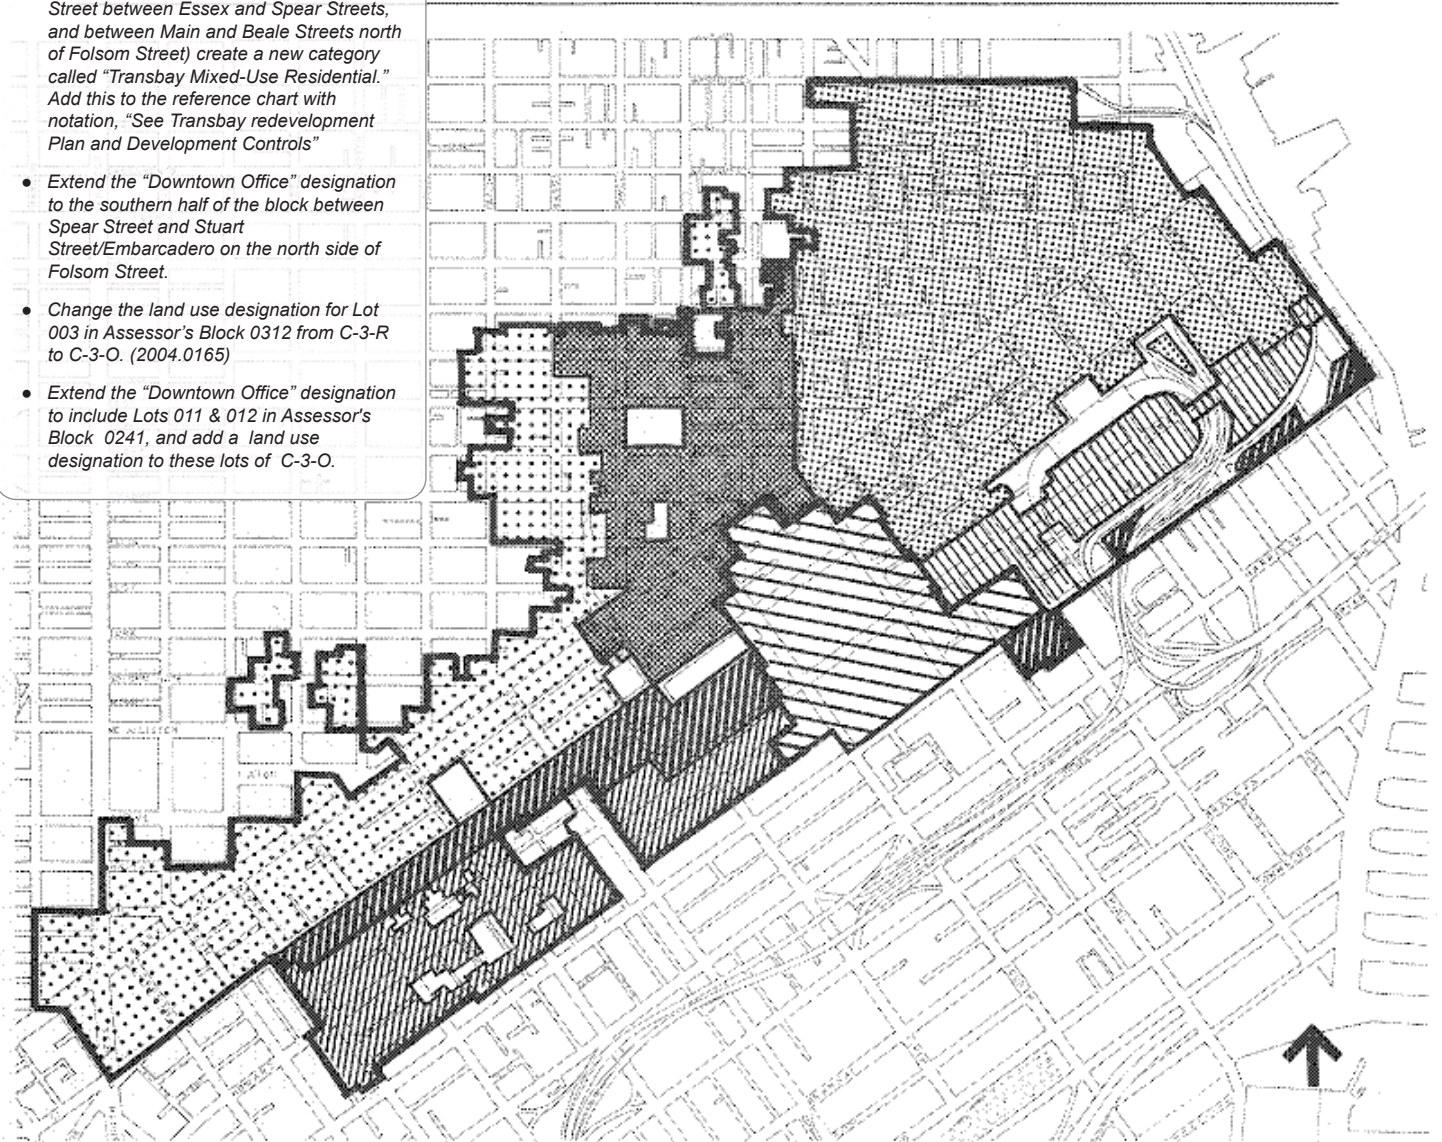

DOWNTOWN LAND USE AND DENSITY PLAN

Map 1

Predominant Commercial Use Type	Building Commercial Intensity Density*	Height	Appropriate Zoning District
Downtown Office	FAR 9:1		C-3-O
Downtown Office	6:1		C-3-O (SD)
Downtown Retail	6:1		C-3-R
Downtown General Commercial	6:1		C-3-G
Downtown Service	5:1		C-3-S
Downtown Service, Industrial	2:1 office, 5:1 other		C-3-S (SU)
Mixed Use	See Yerba Buena Center Redevelopment Plan		

*Unused FAR may be transferred from preservation sites to development sites up to a maximum FAR of 18:1 in the C-3-O and C-3-O (SD) districts and up to one and one half times the basic FAR in the C-3-R, C-3-G and C-3-S districts. See Preservation of the Past Chapter.

NOTE: The notations shown in italics represent recent amendments to the General Plan. This map is intended only as a temporary placeholder, and will be replaced by final maps illustrating these amendments in graphic form.